

RD781 REGIONAL DRIVE


Size	Standard Rim	PR	Load				Pressure				Load Index		Tread Depth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
			KG		lbs		kPa		psi		S	D			D	B
			S	D	S	D	S	D	S	D						
CN/VN 11R22.5	8.25	16	3000	2725	6610	6005	830	830	120	120	146	143	19.5	K	1065	279
VN 12R22.5	9.00	18	3550	3250	7825	7165	930	930	135	135	152	149	20	K	1096	300
CN/VN 295/80R22.5	9.00	18	3550	3250	7830	7160	900	900	130	130	152	149	21	L	1044	298
CN/VN 315/80R22.5	9.00	20	4000	3650	8820	8045	850	850	125	125	156	153	20	L	1076	312

Drive position tire suitable for medium and long-distance travel on normal road applications.

Meticulously spaced tread block pattern improves traction.

Overall tread pattern design allows for even ground distribution pressure which offers greater handling stability.

Deepened pattern designed with greater wear and tear resistant rubber compounding improves tire mileage.

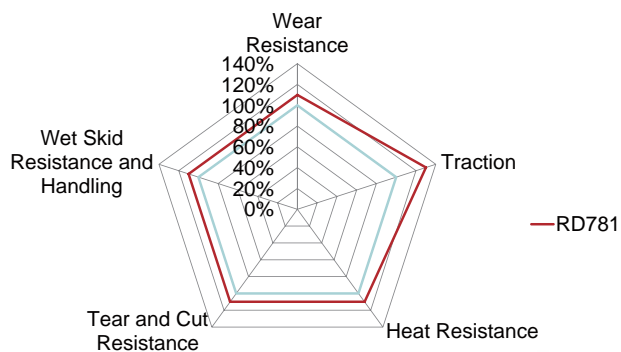

TIRE FEATURES:

- 1 Strengthened shoulder ribs and groove ribs designed between tread blocks improve tear resistance and promote even wear.
- 2 Open shoulder and meticulously spaced block designs improve traction and heat dissipation.
- 3 Optimized contour design and widened tread offer excellent tire mileage.
- 4 Material distribution and enhanced strength belts improve overall safety.

