




RH621 REGIONAL / LONG HAUL STEER

Steer position tire for medium and long distance travel on good road applications.
Tread compounding effectively improves wear resistance.
Unique shoulder and sipe design promote even shoulder wear.
Widened running surface improves traction.

TIRE FEATURES

- 1 Groove and sipe design improve tire grip.
- 2 The widened running surface improves pressure distribution for better grounding performance.
- 3 Designs at the bottom of the main grooves improve handling and driving comfort.
- 4 The widened shoulders and shallow groove design effectively dissipate heat to promote even shoulder wear.

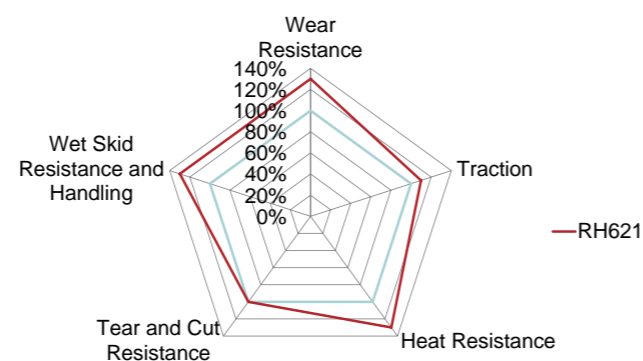

Size	Standard Rim	PR	Load				Pressure				Load Index		TreadDepth (mm)	Speed Grade	Inflated Tire Dimension (mm)	
			KG		lbs		kPa		psi		S	D			D	B
CNWN 205/75R17.5	6.00	14	1600	1500	3525	3305	750	750	110	110	124	122	13	M	753	205
CNWN 215/75R17.5	6.00	14	1700	1600	3750	3525	700	700	110	110	126	124	12.5	M	767	211
CNWN 215/75R17.5	6.00	16	2180	2060	4805	4540	860	860	125	125	135	133	12.5	L	767	211
CNWN 235/75R17.5	6.75	18	2725	2575	6005	5675	860	860	125	125	143	141	13	L	797	233
CN 225/80R17.5	6.75	14	1550	1500	3420	3310	700	700	102	102	123	122	13	M	805	226
CN 8.5R17.5	6.00	12	1450	1400	3195	3085	625	625	90	90	121	120	11	M	802	215
CN 9.5R17.5	6.75	18	2725	2575	6005	5675	875	875	125	125	143	141	13.5	J	842	240
CN 225/70R19.5	6.75	14	1800	1700	3970	3750	760	760	110	110	128	126	12.5	L	811	226
CN 245/70R19.5	7.50	16	2240	2120	4940	4675	830	830	120	120	136	134	13	M	839	248
CN 245/70R19.5	7.50	18	2800	2650	6175	5840	900	900	130	130	144	142	13	J	839	248
CN 265/70R19.5	7.50	18	2725	2575	6005	5675	900	900	130	130	143	141	13.5	J	867	262
CN 255/70R22.5	7.50	16	2500	2300	5510	5070	830	830	120	120	140	137	13.5	M	930	255
CN 275/70R22.5	8.25	16	3150	2900	6940	6395	900	900	130	130	148	145	14.5	M	958	275
VN 285/70R19.5	8.25	18	3350	3150	7390	6940	900	900	130	130	150	148	13	K	895	283
CNWN 295/80R22.5	9.00	18	3550	3250	7825	7165	900	900	130	130	152	149	16	M	1044	298
CN 295/60R22.5	9.00	18	3350	3075	7390	6780	900		130		150	147	14.5	L	926	292
CN 305/70R22.5	9.00	20	3650	3350	8050	7390	900	900	130	130	153	150	15	K	1000	305
CN 315/60R22.5	9.75	18	3550	3150	7825	6945	900		130		152	148	14.5	L	950	313
VN 315/70R22.5	9.00	18	4000	3350	8820	7385	900	900	130	130	156	150	15.5	L	1014	312
VN 315/70R22.5	9.00	16	3550	3150	7830	6940	850	850	123	123	152	148	15.5	M	1014	312
VN 315/70R22.5	9.00	18	3750	3350	8265	7385	900	900	130	130	154	150	15.5	L	1014	312
CNWN 315/80R22.5	9.00	20	4000	3650	8820	8050	850	850	125	125	156	153	16.5	L	1076	312
VN 315/80R22.5	9.00	16	3750	3350	8270	7385	825	825	120	120	154	150	16.5	M	1076	312
CNWN 315/80R22.5	9.00	18	4000	3350	8820	7385	850	850	125	125	156	150	16.5	L	1076	312
CN 11R22.5	8.25	16	3150	2900	6940	6395	850	850	123	123	148	145	15	M	1054	279